

**Wi-Fi 6E**

# AXE5400 Wi-Fi 6E Bluetooth 5.3 PCIe Adapter

Model: MA86XE

## // Highlights

- Ultra Fast 2402 Mbps + 2402 Mbps + 574 Mbps Tri-Band Wi-Fi†
- Powerful Wi-Fi 6E Chipset
- Extends Your Wi-Fi into the 6 GHz Band
- Armed with Bluetooth 5.3\*
- Supported operating system: Windows 10, 11 (64 bit)



## // Features

### Upgrade Your PC to the Latest Wi-Fi 6E

MA86XE arms your PC with Wi-Fi 6E technology and the brand-new 6 GHz band, unlocking your Wi-Fi 6E router's full potential. The latest band is wide enough for 7 extra 160 MHz channels and exclusive to Wi-Fi 6E devices, which prevents drops in speed and interference from legacy devices.†




### Stream Without Lag

MA86XE reduces latency by combining the powerful Wi-Fi 6E Chipset, OFDMA, and MU-MIMO. Game online, watch 4K videos, and crank up everything to the highest settings without lag.†

### Bluetooth 5.3 Supported

MA86XE makes your PC Bluetooth-capable with ultra-fast Bluetooth 5.3 which achieves more stable connection, farther range and faster transmission speeds than Bluetooth 4. Just connect your Bluetooth devices to your computer and enjoy with ease.\*\*\*

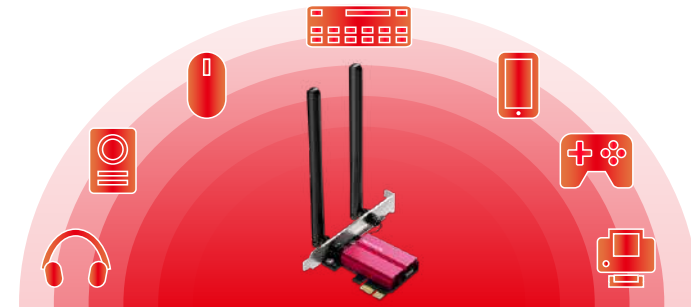

### Overall Security Protection

The latest security standard, WPA3, provides improved comprehensive Wi-Fi protection to defend your devices and private information against brute-force attacks.§

## // Specifications

### Wireless

---

#### Wireless Standards

IEEE 802.11 a/ac/ax 6 GHz

IEEE 802.11 a/ac/ax 5 GHz

IEEE 802.11 b/g/n/ax 2.4 GHz

#### Signal Rate

2402 Mbps on 6 GHz

2402 Mbps on 5 GHz

574 Mbps on 2.4 GHz

#### EIRP

5 GHz: 20dBm(FCC) / 15dBm(CE) (EIRP)

2.4 GHz: 20dBm(FCC) / 16dBm(CE) (EIRP)

6 GHz: 12dBm(FCC)

### Hardware

---

#### Antennas

2× Fixed High-Performance

Omni-Directional Antennas

#### Dimensions

226.3 × 120.8 × 21.5 mm

(8.9 × 4.8 × 0.85 in)

#### Reception Sensitivity

6 GHz:

11ax HE160 MCS0: -86 dBm

11ax HE160 MCS11: -56 dBm

5 GHz:

11ax HE80 MCS0: -90 dBm

11ax HE80 MCS11: -59 dBm

11a 54Mbps: -77 dBm

11ac VHT80 MCS0: -92dBm

11ac VHT80 MCS9: -64dBm

2.4 GHz:

11ax HE40 MCS0: -91 dBm

11ax HE40 MCS11: -60 dBm

11g 54Mbps: -76 dBm

11n HT40 MCS7: -72dBm

### Software

---

#### Working Mode

Infrastructure mode

#### Wireless Security

WPA-PSK/WPA2-PSK/WPA3-SAE\*\*

## // Specifications

### Others

---

#### Environment

Operating Temperature: 0°C~40°C (32°F~104°F)

Operating Humidity: 10%~90% Non-Condensing

Storage Humidity: 5%~90% Non-Condensing

#### Package Contents

AXE5400 Wi-Fi 6E Bluetooth 5.3 PCIe Adapter (MA86XE)

Bluetooth Header Cable

Quick Installation Guide

Resource CD

#### Certification

FCC, CE, RoHS

#### System Requirements

Windows 11/10 (64-bit)<sup>△</sup>

Specifications are subject to change without notice. All brands and product names are trademarks or registered trademarks of their respective holders. Copyright © 2024 MERCUSYS. All rights reserved.

<sup>†</sup>Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage, and number of connected devices are not guaranteed and will vary as a result of network conditions, AP limitations, and environmental factors, including building materials, obstacles, volume and density of traffic, and AP location.

<sup>‡</sup>Use of Wi-Fi 6, Wi-Fi 6E(802.11ax), and features including OFDMA, MU-MIMO, 1024-QAM, or HE160 requires APs to also support the corresponding features. 160 MHz channels may not be all available in the 5 GHz or 6 GHz band in some regions/countries due to regulatory restrictions.

<sup>△</sup>Functionality of MA86XE may be restricted on some computing systems and platforms. Please try to update the device's driver for feature compatibility.

<sup>§</sup>Use of WPA3 requires APs to also support WPA3.

<sup>\*</sup>Several new features are introduced in the Bluetooth Core Specification 5.0, 5.2 and 5.3 Release, including 2× faster speed and 4× broader coverage compared with Bluetooth 4.2.